


FRED

Ultrafast Soft Recovery Diode, 60A

Features:

- Ultrafast Recovery
- 175°C operating junction temperature
- High frequency operation
- Low power loss, less RFI and EMI
- Low I_R value
- High surge capacity
- Epitaxial chip construction

Product Summary	
V_R	600 V
$I_{F(AV)}$	60A
t_{rr}	32ns

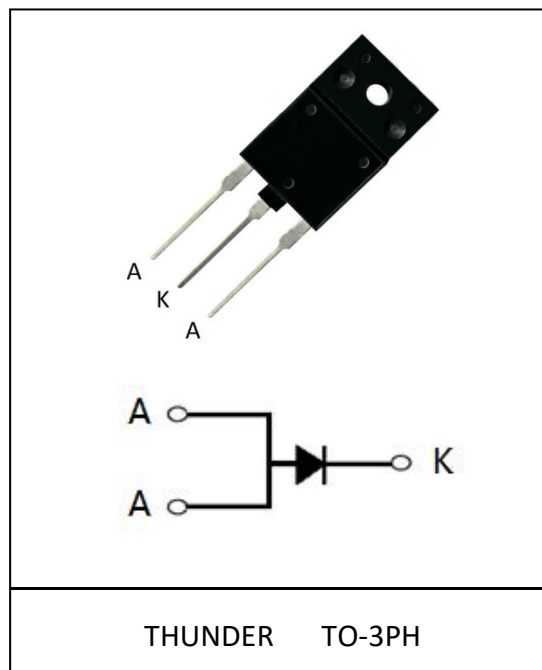

Description/Applications

These diodes are optimized to less losses and EMI/RFI in high frequency power conditioning system. The soft recovery behavior of the diodes offers the need as snubber in most applications. These devices are ideally suited for HF welding power converters and other applications where the switching losses are not significant portion of the total losses.

Absolute Maximum Ratings

Parameter	Symbol	Test Conditions	Values	Units
Repetitive peak reverse voltage	V_{RRM}		600	V
Continuous forward current	$I_{F(AV)}$	$T_c = 110^\circ\text{C}$	60	A
Single pulse forward current	I_{FSM}	$T_c = 25^\circ\text{C}$	600	
Maximum repetitive forward current	I_{FRM}	Square wave, 20kHz	120	
Operating junction	T_j		175	$^\circ\text{C}$
Storage temperatures	T_{stg}		-55 to +175	$^\circ\text{C}$

Electrical characteristics (Ta=25°C unless otherwise specified)

Parameter	Symbol	Test Conditions	Min	Typ.	Max.	Units
Breakdown voltage Blocking voltage	V_{BR} , V_R	$I_R=100\mu A$	600			V
Forward voltage	V_F	$I_F=60A$		1.45	1.80	
		$I_F=60A, T_J=125^\circ C$		1.30	1.70	
Reverse leakage current	I_R	$V_R=V_{RRM}$			50	μA
		$T_J=150^\circ C, V_R=600V$			500	
Reverse recovery time	t_{rr}	$I_F=0.5A, I_R=1A, I_{RR}=0.25A$		50	70	ns
		$I_F=1A, V_R=30V, di/dt=200A/\mu s$		32	45	
Reverse recovery time	t_{rr}	$I_F=60A, V_R=300V,$ $di_F/dt=-200A/\mu s, T_J=25^\circ C$		55		ns
Maximum Reverse Recovery Current	I_{RM}			5		A
Reverse Recovery Charge	Q_{rr}			346		nC
Reverse recovery time	t_{rr}	$I_F=60A, V_R=300V,$ $di_F/dt=-200A/\mu s, T_J=125^\circ C$		132		ns
Maximum Reverse Recovery Current	I_{RM}			12		A
Reverse Recovery Charge	Q_{rr}			1960		nC

Thermal characteristics

Paramter	Symbol	Typ	Units
Junction-to-Case	$R_{\theta JC}$	0.75	$^\circ C/W$

Electrical performance (typical)

FIG.1 Forward Characteristic (typical)

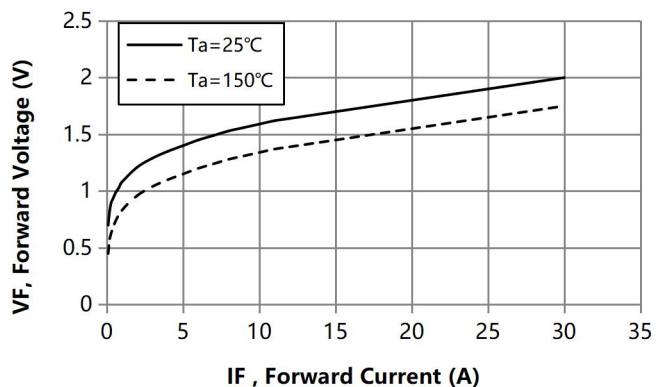


FIG.2 Reverse Characteristic (Typical)

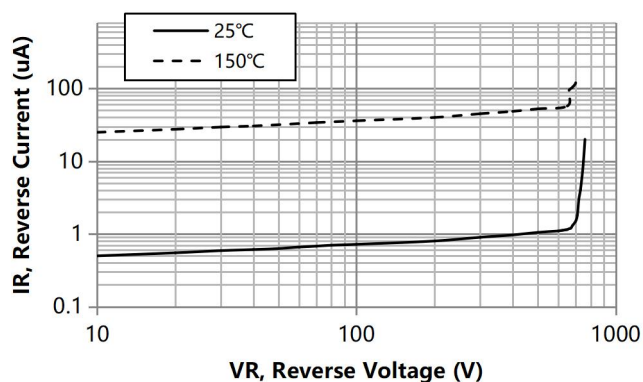


FIG.3 Reverse Recover Time vs. Current Rate of Change

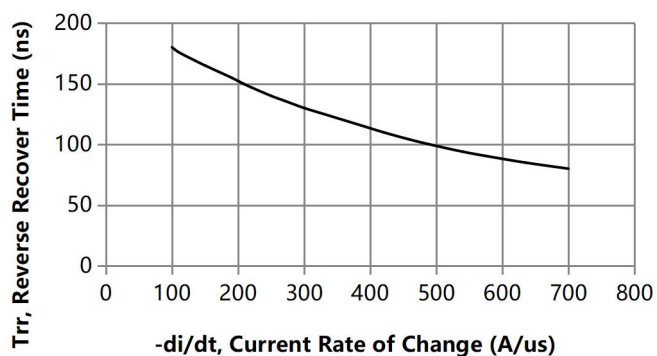


FIG.4 Reverse Recover Charge vs. Current Rate of Change

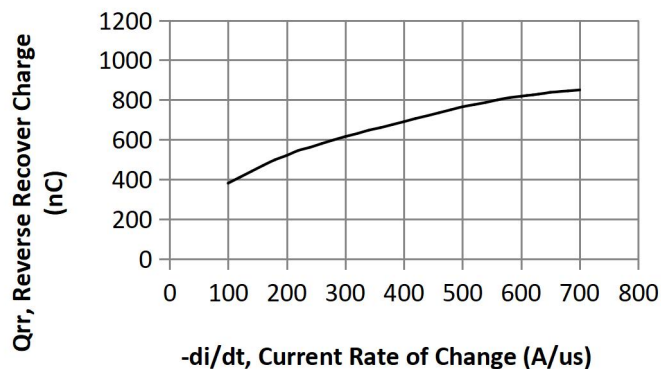


FIG.5 Reverse Recover Current vs. Current Rate of Change



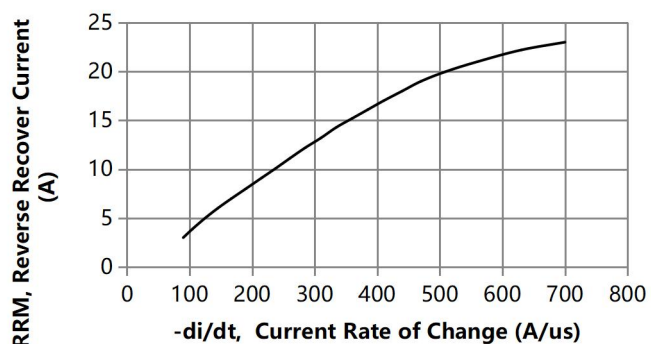


FIG.6 Average Forward Current vs. Case Temperature

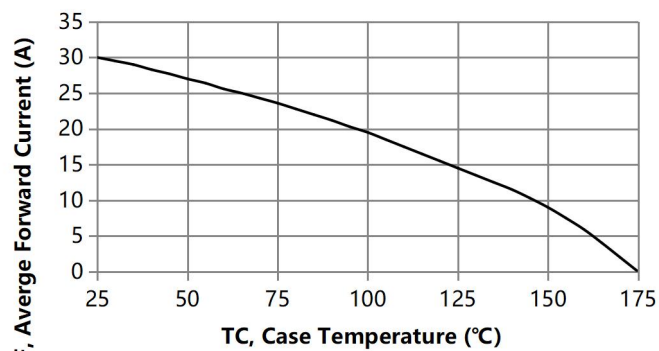

Package Information

TO-3PH PACKAGE

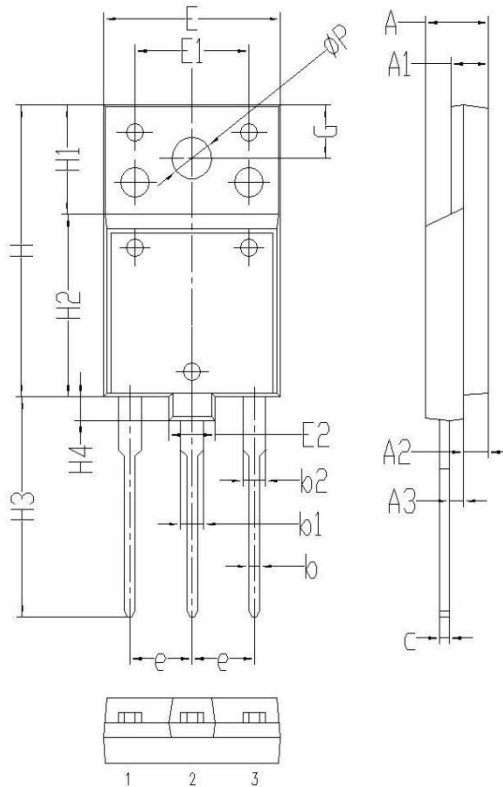

Symbol	Unit mm		
	Min	Typ	Max
A	5.35	5.55	5.75
A1	2.80	3.00	3.20
A2	1.90	2.10	2.30
A3	1.10	1.30	1.50
b	0.65	0.75	0.85
b1	1.80	2.00	2.20
b2	1.80	2.00	2.20
c	0.70	0.90	1.10
e	5.25	5.45	5.65
E	15.3	15.5	15.7
E1	9.80	10.0	10.2
E2	3.80	4.00	4.20
H	24.3	24.5	24.7
H1	9.00	9.20	9.40
H2	15.1	15.3	15.5
H3	18.5	19.0	19.5
H4	1.80	2.00	2.20
H5	4.80	5.00	5.20
G	4.3	4.5	4.7
ΦP	3.40	3.60	3.80

Notice

Thunder Microelectronics Incorporated Limited reserves the right to make changes without further notice to any products or specifications herein. When use the product, be sure to obtain the latest specification.

Thunder Microelectronics Incorporated Limited does not assume any liability arising out of the application or any product described herein. When using Thunder Microelectronics Incorporated Limited products in your equipment, you are requested to take adequate safety measures to prevent the equipment from causing a physical injury ,fire or other problem if any of the products become faulty.

-Headquarters

WuXi Thunder Microelectronics Incorporated Limited

Building E1-9F, No.200 LingHu Road, XinWu district,WuXi,China 214135

Tel:+86-510-85160109

Fax:+86-510-85160109