

Silicon Field Stop(FS) Planar IGBT Module


Description

The THGM75N120L1BH is use advanced field stop(FS) technology.

The 1200V FS IGBT module offers superior conduction and switching performances.

General Features

- 1200V Breakdown Voltage
- Low saturation voltage: $V_{CE(sat)}$, typ=2.3V@ $I_C=75A$
- FS Planar Technology, Positive temperature coefficient
- High speed switch & Low power loss

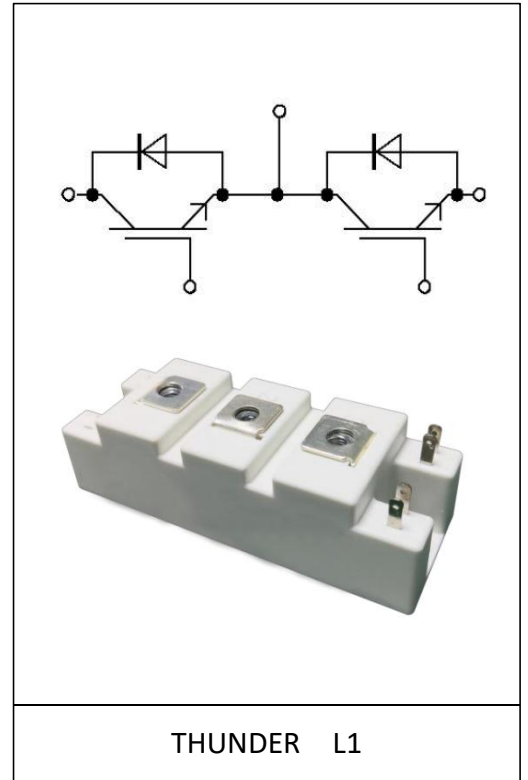

Application

- The inverter
- Motor control and drives

Product Summary

V_{CE}	1200V
$V_{CE(sat)}$	2.3V
I_C	75A

MAXIMUM RATINGS ($T_J = 25^\circ C$ unless otherwise noted)

Parameter		Symbol	Value	Unit
Collector-to-Emitter Voltage		V_{CE}	1200	V
Gate-to-Emitter Voltage		V_{GE}	± 30	V
Collector Current	$T_C=25^\circ C$	I_C	150	A
	$T_C=100^\circ C$		75	
Power Dissipation	$T_C=25^\circ C$	P_D	789	W
	$T_C=100^\circ C$		394	

Pulsed Collector Current	$T_C=25^{\circ}\text{C}$ $t_p=10\mu\text{s}$ (Note 1)	I_{CM}	225	A
Diode Forward Current	$T_C=25^{\circ}\text{C}$	I_F	150	
	$T_C=100^{\circ}\text{C}$		75	
Pulsed Diode Forward Current	$T_C=25^{\circ}\text{C}$ $t_p=10\mu\text{s}$ (Note 1)	I_{FM}	225	
Short Circuit Withstand Time $V_{GE} = 15\text{ V}$, $V_{CC} = 800\text{ V}$, $T_C = 150^{\circ}\text{C}$		T_{SC}	10	μs
Operating Junction and Storage Temperature Range		T_J, T_{stg}	-55 To +175	$^{\circ}\text{C}$
Lead Temperature for Soldering Purposes		T_L	270	

THERMAL CHARACTERISTICS

Parameter	Symbol	Value	Unit
Thermal Resistance, Junction-to-Case for IGBT	R_{thJC}	0.19	$^{\circ}\text{C}/\text{W}$
Thermal Resistance, Junction-to-Ambient	R_{thJA}	62.5	

ELECTRICAL CHARACTERISTICS ($T_J = 25^{\circ}\text{C}$ unless otherwise specified)

Parameter	Symbol	Value			Unit	Test Condition
		min.	typ.	max.		

OFF CHARACTERISTICS

Collector-to-Emitter Breakdown Voltage	BV_{CES}	1200	-	-	V	$V_{GE}=0\text{ V}, I_C=1\text{ mA}$
Zero Gate Voltage Collector Current	I_{CES}	-	-	40	μA	$V_{GE}=0\text{ V}, V_{CE}=V_{CES}$
Gate-to-Emitter leakage Current	I_{GES}	-	-	± 400	nA	$V_{GE}=\pm 30\text{ V}, V_{CE}=0\text{ V}$

ON CHARACTERISTICS

Gate-to-Emitter Threshold Voltage	$V_{GE(th)}$	4.8	-	6.6	V	$V_{GE}=V_{CE}, I_C=1\text{ mA}, T_J=25^{\circ}\text{C}$
Collector-to-Emitter Saturation Voltage	$V_{CE(sat)}$	-	2.3	2.8	V	$V_{GE}=15\text{ V}, I_C=75\text{ A}, T_J=25^{\circ}\text{C}$

DYNAMIC CHARACTERISTICS

Input Capacitance	C_{IES}	-	6221	-	pF	$V_{CE} = 25\text{ V}, V_{GE} = 0\text{ V},$ $f = 1\text{ MHz}$
Output Capacitance	C_{OES}	-	433	-		
Reverse Transfer Capacitance	C_{RES}	-	140	-		
Total Gate Charge	Q_G	-	310	-	nC	$V_{CE} = 600\text{ V}, V_{GE} = 15\text{ V},$ $I_C = 75\text{ A}$

SWITCHING CHARACTERISTICS

Turn-On Delay Time	$t_{d(on)}$	-	202	-	ns	$V_{CE} = 600\text{ V}$ $V_{GE} = 0/15\text{ V}$ $I_C = 75\text{ A}$ $R_G = 30\ \Omega$ $T_J = 25^{\circ}\text{C}$
Turn-Off Delay Time	$t_{d(off)}$	-	398	-		
Rise time	t_r	-	42	-		
Fall time	t_f	-	155	-		
Turn-On Switching Loss	E_{on}	-	11	-	mJ	
Turn-Off Switching Loss	E_{off}	-	3.9	-		
Total Switching Loss	E_{ts}	-	14.9	-		

ELECTRICAL CHARACTERISTICS ($T_J = 25^\circ\text{C}$ unless otherwise specified) (continued)

Parameter	Symbol	Value			Unit	Test Condition
		min.	typ.	max.		

SWITCHING CHARACTERISTICS
DIODE CHARACTERISTICS

Diode Forward Voltage	V_F	-	2.2	3.3	-	$I_F = 75\text{ A}, T_J = 25^\circ\text{C}$
-----------------------	-------	---	-----	-----	---	---

DIODE SWITCHING CHARACTERISTICS, INDUCTIVE LOAD

Reverse Recovery Time	t_{rr}	-	45	-	ns	$V_R = 600\text{ V}, I_F = 75\text{ A},$ $dI_F/dt = 200\text{ A}/\mu\text{s}$ $T_J = 25^\circ\text{C}$
Reverse Recovery Charge	Q_{rr}	-	1300	-	nC	
Reverse Recovery Energy	E_{rec}	-	0.18	-	mJ	
Peak Reverse Recovery Current	I_{RRM}	-	45	-	A	

Typical Performance Characteristics

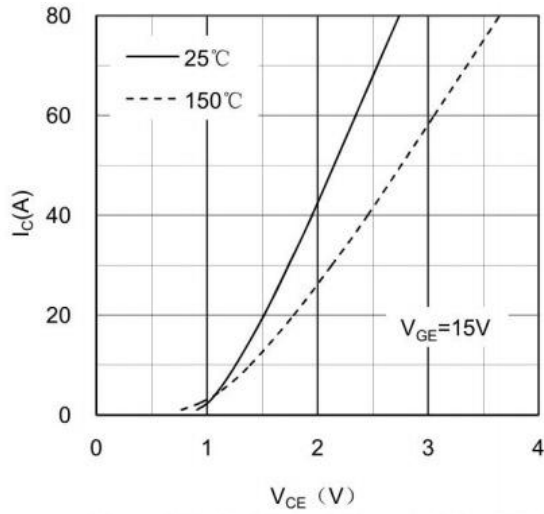


Figure 1. Typical Output Characteristics IGBT

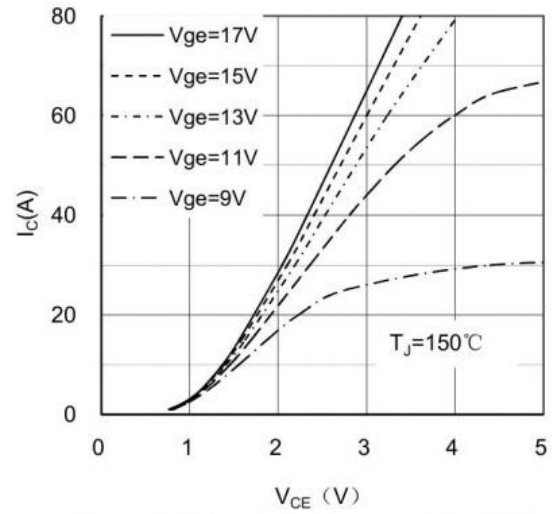


Figure 2. Typical Output Characteristics IGBT

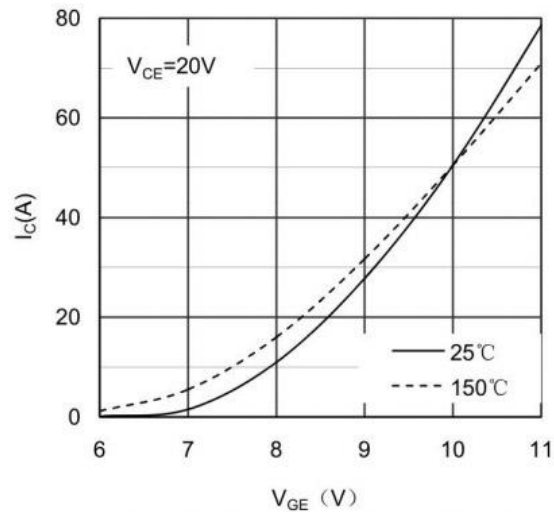


Figure 3. Typical Transfer characteristics IGBT

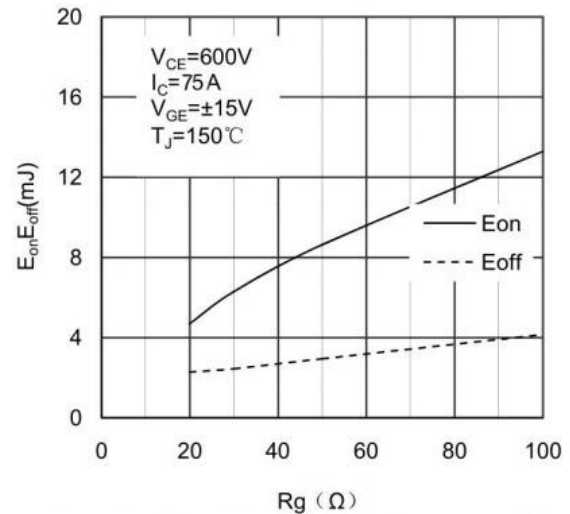


Figure 4. Switching Energy vs Gate Resistor IGBT

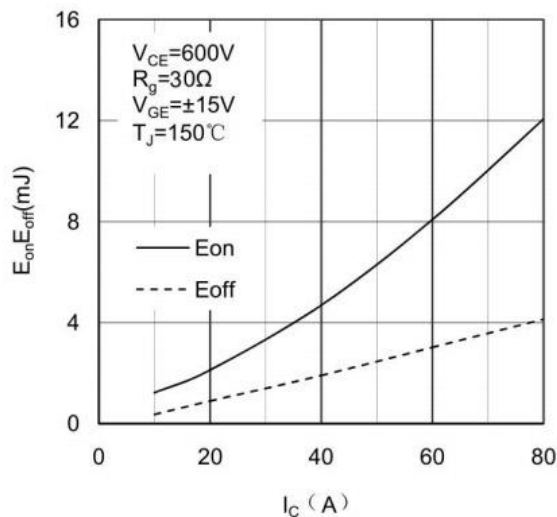


Figure 5. Switching Energy vs Collector Current IGBT

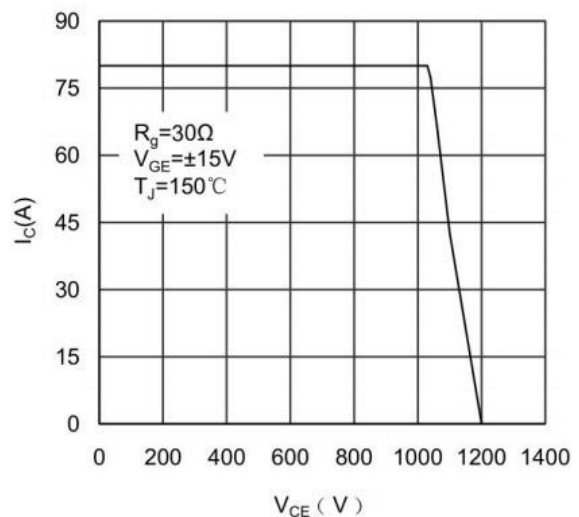


Figure 6. Reverse Biased Safe Operating Area IGBT

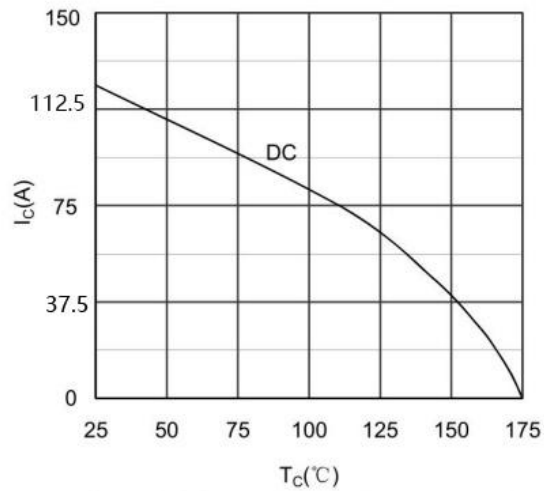


Figure 7. Collector Current vs Case temperature IGBT

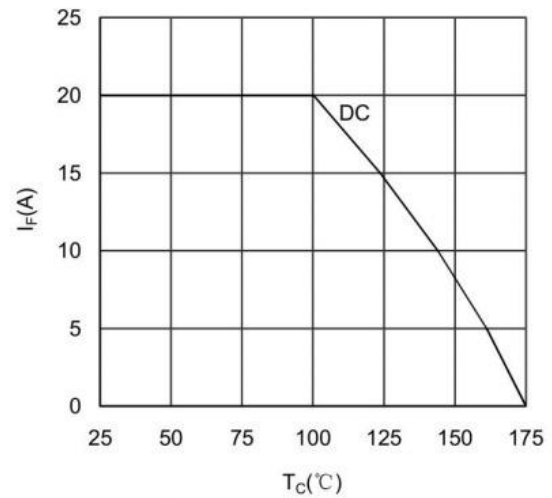


Figure 8. Forward current vs Case temperature Diode

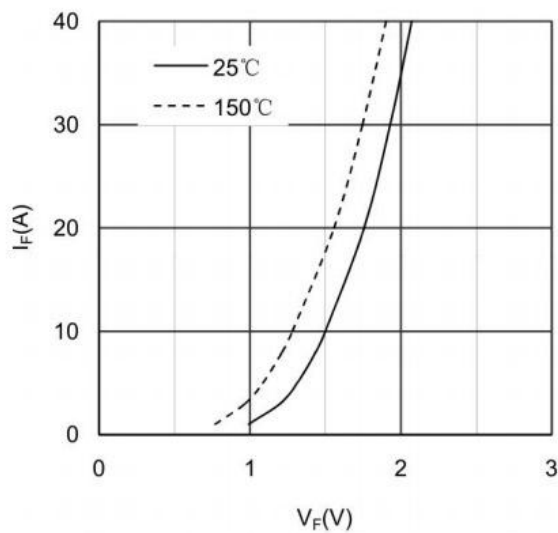


Figure 9. Diode Forward Characteristics Diode

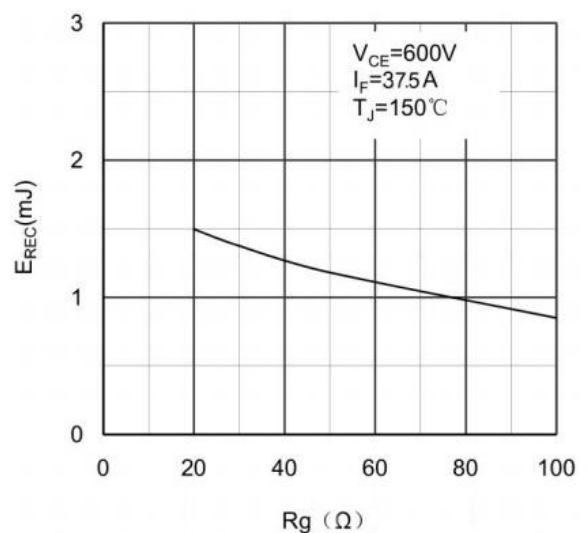


Figure 10. Switching Energy vs Gate Resistor Diode

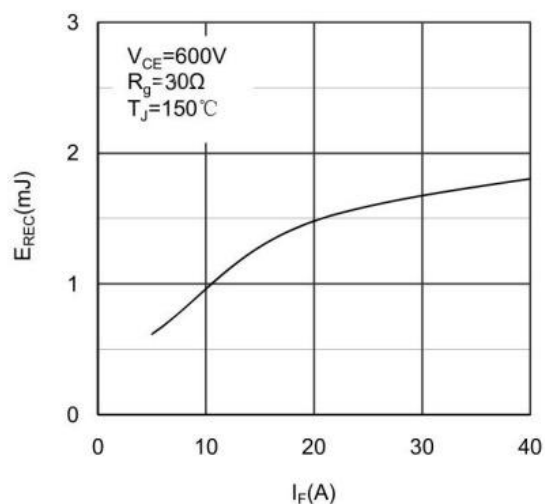


Figure 11. Switching Energy vs Forward Current Diode


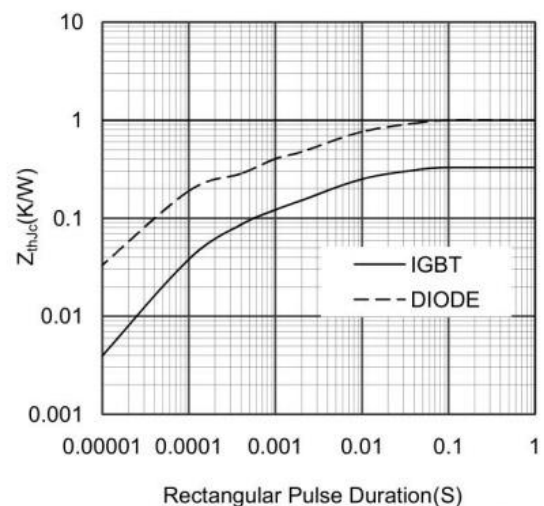



Figure 12. Transient Thermal Impedance of Diode and IGBT

Circuit Diagram

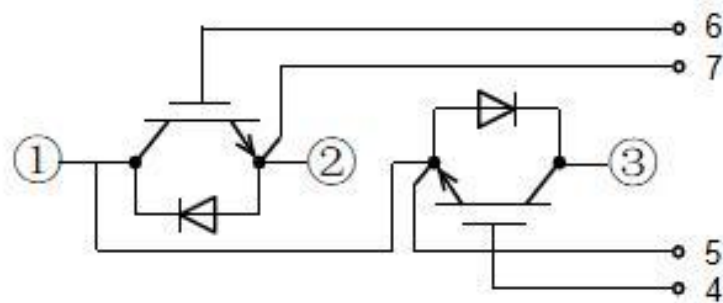

PackageDimensions

(Dimensions in Millimeters)

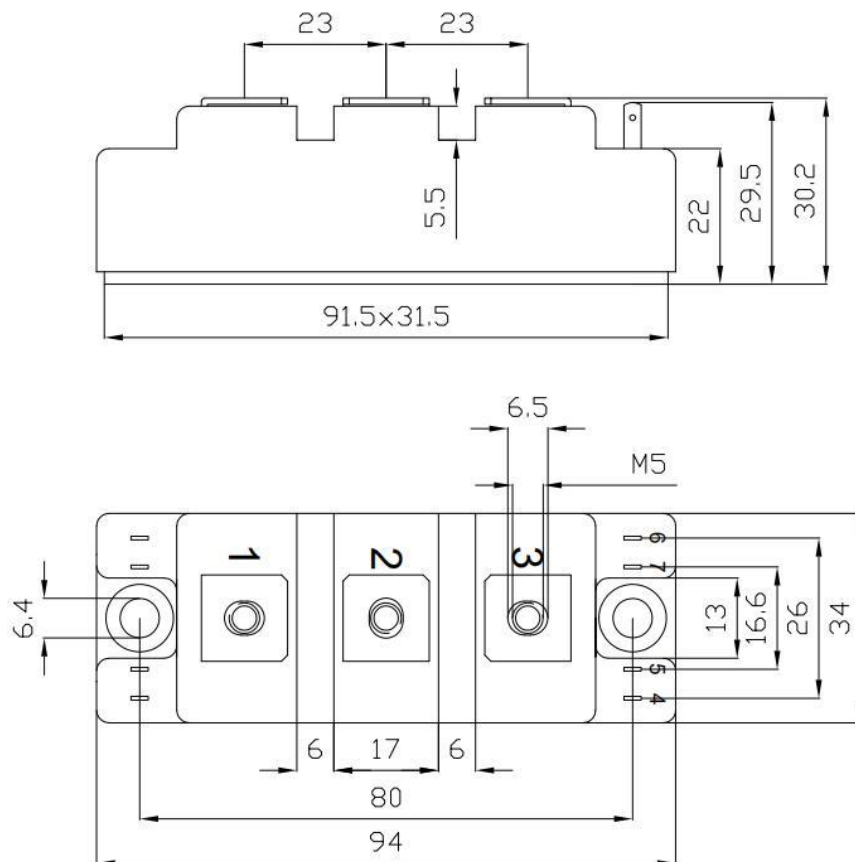

Notice

Thunder Microelectronics Incorporated Limited reserves the right to make changes without further notice to any products or specifications herein. When use the product, be sure to obtain the latest specification.

Thunder Microelectronics Incorporated Limited does not assume any liability arising out of the application or any product described herein. When using Thunder Microelectronics Incorporated Limited products in your equipment, you are requested to take adequate safety measures to prevent the equipment from causing a physical injury ,fire or other problem if any of the products become faulty.

-Headquarters

WuXi Thunder Microelectronics Incorporated Limited

Building E1-9, No.200 LingHu Road, XinWu district,WuXi,China 214135

Tel:+86-510-85160109

Fax:+86-510-85160109