

## Silicon N-Channel Power MOSFET

### Description


The TH7N65PF uses advanced technology and design to provide excellent  $R_{DS(ON)}$ . It can be used in a wide variety of applications.

### General Features

- $V_{DS}=650V, I_D=7A$
- Low ON Resistance
- Low Reverse transfer capacitances
- 100% Single Pulse avalanche energy Test

### Application

- Power switching application
- Adapter and charger

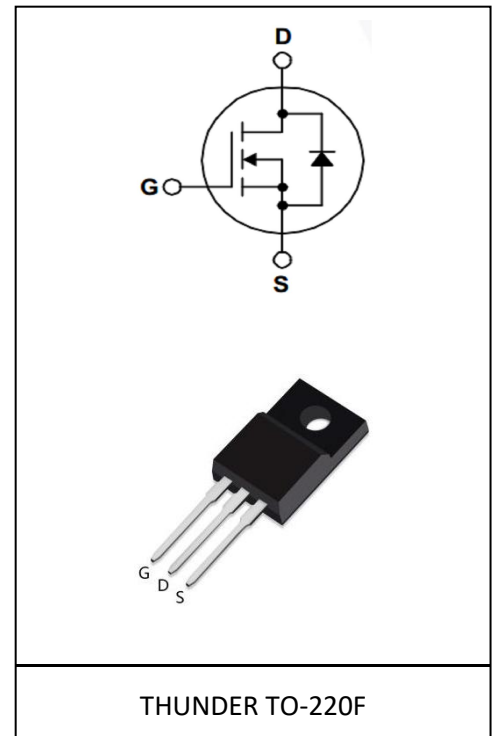

### Electrical Characteristics @ $T_a=25^{\circ}C$ (unless otherwise specified)

#### a) Absolute Maximum Ratings:

| Symbol   | Parameter                                       | Value | Units       |
|----------|-------------------------------------------------|-------|-------------|
| $V_{DS}$ | Drain-to-Source Breakdown Voltage               | 650   | V           |
| $I_D$    | Drain Current (continuous) at $T_c=25^{\circ}C$ | 7     | A           |
| $I_{DM}$ | Drain Current (pulsed)                          | 28    | A           |
| $V_{GS}$ | Gate to Source Voltage                          | +/-30 | V           |
| $P_D$    | Total Dissipation at $T_c=25^{\circ}C$          | 50    | W           |
|          | Total Dissipation at $T_a=25^{\circ}C$          | 1.5   | W           |
| $T_j$    | Max. Operating Junction Temperature             | 150   | $^{\circ}C$ |
| $E_{AS}$ | Single Pulse Avalanche Energy                   | 450   | mJ          |

**b) Electrical Parameters:**

| Symbol       | Parameter                            | Test Conditions                             | Min | Typ | Max  | Unit     |
|--------------|--------------------------------------|---------------------------------------------|-----|-----|------|----------|
| $V_{DS}$     | Drain-source Voltage                 | $V_{GS}=0V, I_D=250\mu A$                   | 650 |     |      | V        |
| $R_{DS(on)}$ | Static Drain-to-Source on-Resistance | $V_{GS}=10V, I_D=3.5A$                      |     | 1.2 | 1.5  | $\Omega$ |
| $V_{GS(th)}$ | Gated Threshold Voltage              | $V_{DS}=V_{GS}, I_D=250\mu A$               | 2.0 |     | 4.0  | V        |
| $I_{DSS}$    | Drain to Source leakage Current      | $V_{DS}=650V, V_{GS}=0V$                    |     |     | 1.0  | $\mu A$  |
| $I_{GSS(F)}$ | Gated to Source Foward Leakage       | $V_{GS}=+30V$                               |     |     | 100  | nA       |
| $I_{GSS(R)}$ | Gated to Source Reverse Leakage      | $V_{GS}=-30V$                               |     |     | -100 | nA       |
| $C_{iss}$    | Input Capacitance                    | $V_{GS}=0V,$<br>$V_{DS}=25V,$<br>$f=1.0MHZ$ |     | 950 |      | pF       |
| $C_{oss}$    | Output Capacitance                   |                                             |     | 98  |      | pF       |
| $C_{rss}$    | Reverse Transfer Capacitance         |                                             |     | 10  |      | pF       |

**c) Switching Characteristics**

| Symbol       | Parameter           | Test Conditions                           | Min | Typ | Max | Unit |
|--------------|---------------------|-------------------------------------------|-----|-----|-----|------|
| $t_{d(on)}$  | Turn-on Delay Time  | $V_{DD}=325V, I_D=7A,$<br>$R_G=10\Omega$  |     | 11  |     | nS   |
| $t_r$        | Turn-on Rise Time   |                                           |     | 10  |     | nS   |
| $t_{d(off)}$ | Turn-off Delay Time |                                           |     | 36  |     | nS   |
| $t_f$        | Turn-off Fall Time  |                                           |     | 18  |     | nS   |
| $Q_g$        | Total Gate Charge   | $V_{DS}=325V$<br>$I_D=7A$<br>$V_{GS}=10V$ |     | 25  |     | nC   |
| $Q_{gs}$     | Gate-Source Charge  |                                           |     | 4   |     | nC   |
| $Q_{gd}$     | Gate-Drain Charge   |                                           |     | 10  |     | nC   |

**d) Source-Drain Diode Characteristics**


| Symbol           | Parameter                                          | Test Conditions                                          | Min | Typ | Max | Unit |
|------------------|----------------------------------------------------|----------------------------------------------------------|-----|-----|-----|------|
| I <sub>SD</sub>  | S-D Current(Body Diode)                            |                                                          |     |     | 7   | A    |
| I <sub>SDM</sub> | Pulsed S-D Current(Body Diode)                     |                                                          |     |     | 28  | A    |
| V <sub>SD</sub>  | Diode Forward Voltage                              | V <sub>GS</sub> =0V, I <sub>DS</sub> =6A                 |     |     | 1.5 | V    |
| t <sub>rr</sub>  | Reverse Recovery Time                              | T <sub>J</sub> =25℃, I <sub>F</sub> =6A<br>di/dt=100A/us |     | 201 |     | nS   |
| Q <sub>rr</sub>  | Reverse Recovery Charge                            |                                                          |     | 989 |     | μC   |
|                  | *Pulse Test: Pulse Width <= 300μs, Duty Cycle< =2% |                                                          |     |     |     |      |

| Symbol          | Parameter           | Typ | Units        |
|-----------------|---------------------|-----|--------------|
| $R_{\theta JC}$ | Junction-to-Case    | 3.0 | $^\circ C/W$ |
| $R_{\theta JA}$ | Junction-to-Ambient | 100 |              |

## Package Information

### TO-220F PACKAGE

#### 基本尺寸

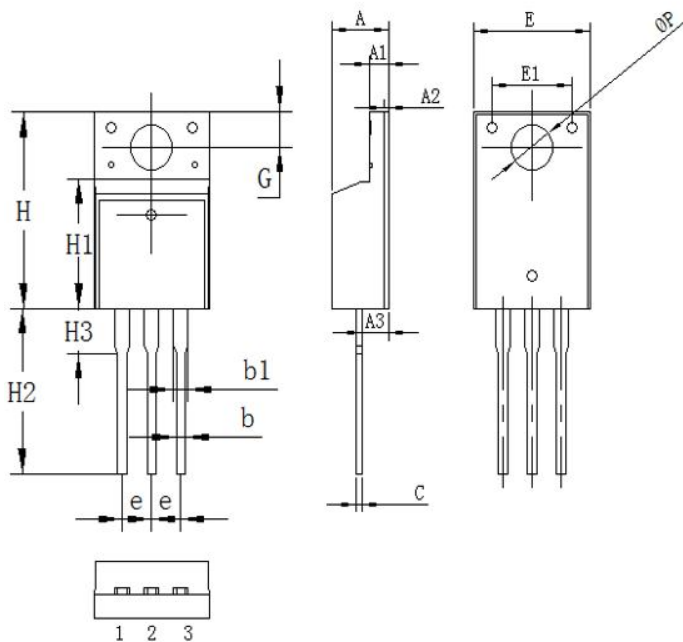

| Symbol | 单位 mm |      |      |
|--------|-------|------|------|
|        | Min   | Nom  | Max  |
| A      | 4.55  | 4.75 | 4.95 |
| A1     | 2.40  | 2.60 | 2.80 |
| A2     | 0.40  | 0.60 | 0.80 |
| A3     | 2.10  | 2.30 | 2.50 |
| b1     | 1.10  | 1.30 | 1.50 |
| b      | 0.60  | 0.80 | 1.00 |
| c      | 0.42  | 0.50 | 0.58 |
| e      | 2.30  | 2.50 | 2.70 |
| E      | 9.9   | 10.1 | 10.3 |
| E1     | 6.8   | 7    | 7.2  |
| H      | 15.8  | 16.0 | 16.2 |
| H1     | 9.10  | 9.30 | 9.50 |
| H2     | 12.5  | 13.0 | 13.5 |
| H3     | 3.10  | 3.30 | 3.50 |
| G      | 3.00  | 3.20 | 3.40 |
| ΦP     | 3.00  | 3.20 | 3.40 |

## Notice

Thunder Microelectronics Incorporated Limited reserves the right to make changes without further notice to any products or specifications herein. When use the product, be sure to obtain the latest specification.

Thunder Microelectronics Incorporated Limited does not assume any liability arising out of the application or any product described herein. When using Thunder Microelectronics Incorporated Limited products in your equipment, you are requested to take adequate safety measures to prevent the equipment from causing a physical injury ,fire or other problem if any of the products become faulty.

### -Headquarters

WuXi Thunder Microelectronics Incorporated Limited

Building E1-9L, No.200 LingHu Road, XinWu district,WuXi,China 214135

Tel:+86-510-85160109

Fax:+86-510-85160109