


Features

- Low Forward Voltage Drop
- High-Speed Switching
- Positive Temperature Coefficient on V_F
- Temperature-Independent Switching Behavior

V_R	650 V
I_F	10 A
Q_C	27 nC

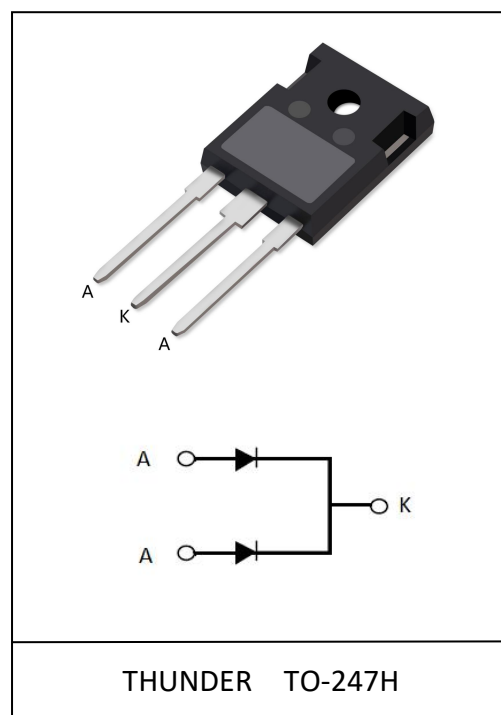

Absolute Maximum Ratings ($T_j=25^\circ\text{C}$ unless otherwise noted)

Symbol	Parameter	Conditions	Value		Unit
			Min	Typ	
V_{RRM}	Repetitive Peak Reverse Voltage	$T_C=25^\circ\text{C}$	-	650	V
V_{DC}	DC Blocking Voltage	$I_R=1\text{mA}$, $T_C=25^\circ\text{C}$	650	880	V
I_F	Continuous Forward Current	$T_C=25^\circ\text{C}$	-	24	A
		$T_C=125^\circ\text{C}$	-	14	A
		$T_C=148^\circ\text{C}$	-	10	A
I_{FSM}	Non-repetitive Peak Forward Surge Current	$T_C=25^\circ\text{C}$, $t_p=10\text{ms}$, Half Sine Wave (After test : $V_F \geq 0.5\text{V}@I_F=1\text{mA}$; $V_R \geq 500\text{V}@I_R=1\text{mA}$; $I_R \leq 5\text{mA}@V_R=650\text{V}$)	56	70	A
		$T_C=125^\circ\text{C}$, $t_p=10\text{ms}$, Half Sine Wave (After test : $V_F \geq 0.5\text{V}@I_F=1\text{mA}$; $V_R \geq 500\text{V}@I_R=1\text{mA}$; $I_R \leq 5\text{mA}@V_R=650\text{V}$)	48	60	A
T_{stg}	Storage Temperature		-55 to 175		$^\circ\text{C}$
T_j	Operating junction temperature range		-55 to 175		$^\circ\text{C}$





Electrical Characteristics

Symbol	Parameter	Conditions	Value			Unit	Note
			Min	Typ	Max		
V _F	Forward Voltage	I _F =10A, T _j =25℃	-	1.32	1.5	V	Fig.1
		I _F =10A, T _j =125℃	-	1.51	-	V	
		I _F =10A, T _j =175℃	-	1.68	-	V	
I _R	Reverse Current	v _R =650V, T _j =25℃	-	0.06	5	μA	Fig.2
		v _R =650V, T _j =125℃	-	0.41	-	μA	
		v _R =650V, T _j =175℃	-	2.48	-	μA	
Q _c	Total Capacitive Charge	v _R =400V, T _j =25℃	-	27	-	nC	Fig.3
C	Total Capacitance	f=1 MHz, V _R =0V, T _j =25℃	-	518	-	pF	Fig.4
		f=1 MHz, V _R =200V, T _j =25℃	-	51	-	pF	
		f=1 MHz, V _R =400V, T _j =25℃	-	48	-	pF	
E _c	Capacitance Stored Energy	v _R =400V, T _j =25℃	-	4.2	-	μJ	

Thermal Characteristics

Symbol	Paramter	Typ	Unit
R _{th(j-c)}	Thermal Resistance , Junction to Case	1.6	℃/W


Electrical Characteristic Curves

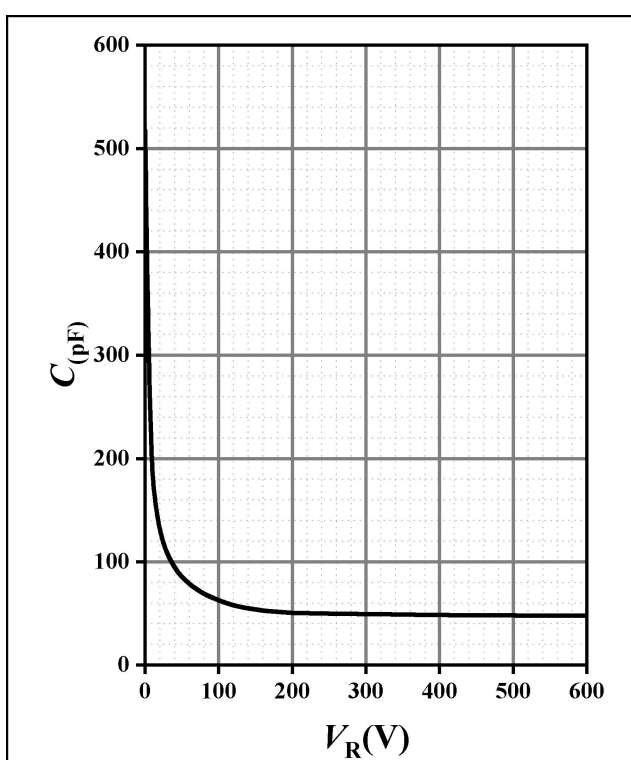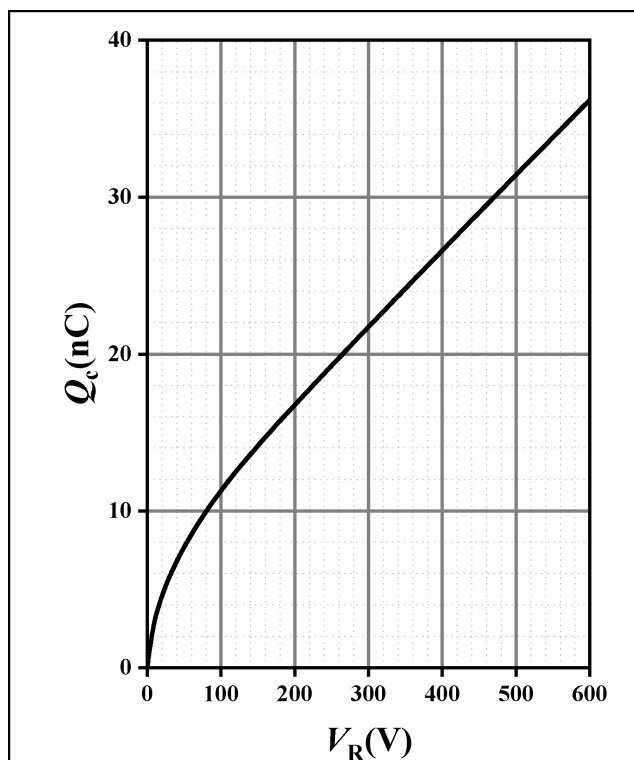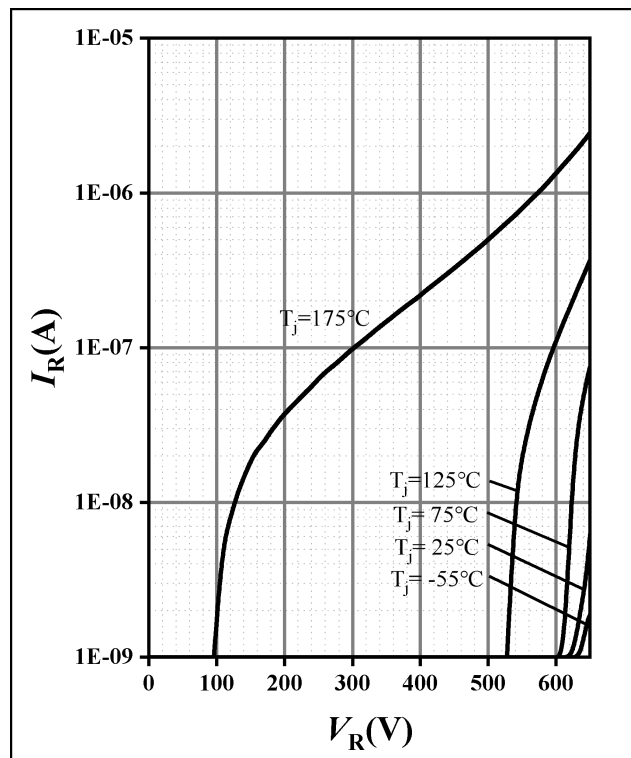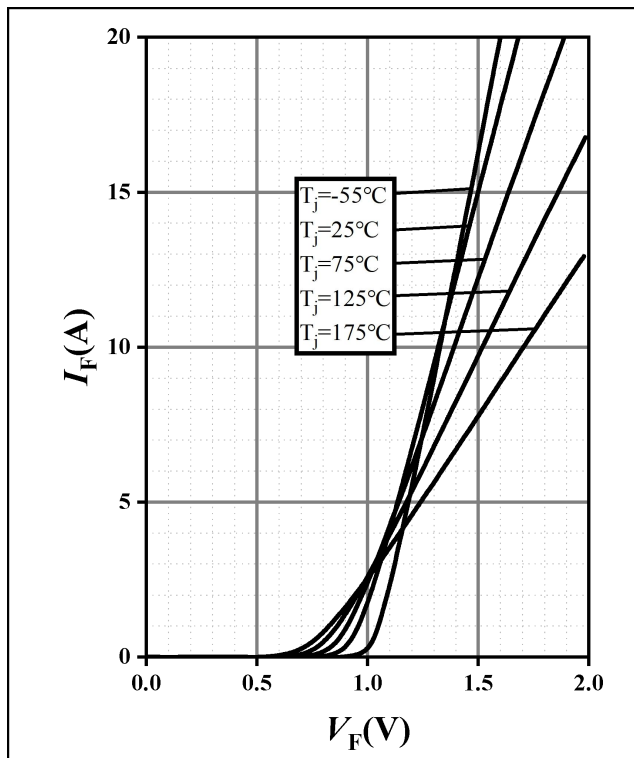

Package Information

TO-247H PACKAGE

基本尺寸

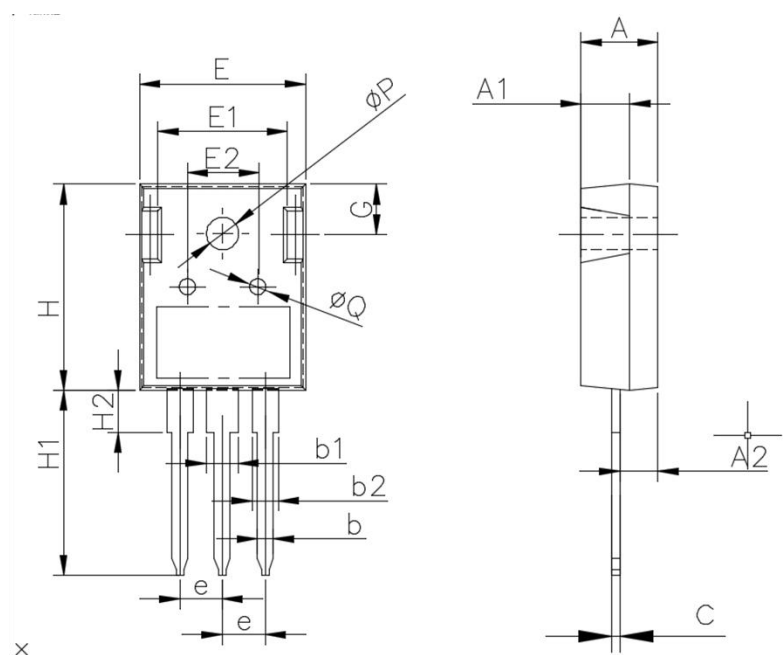

Symbol	单位 mm		
	Min	Nom	Max
A	4.80	5.00	5.20
A1	2.80	3.00	3.20
A2	2.20	2.40	2.60
b	1.05	1.20	1.35
b1	2.80	3.00	3.20
b2	1.80	2.00	2.20
c	0.50	0.60	0.70
e	5.35	5.45	5.75
E	15.6	15.80	16.0
E1	12.3	12.50	12.7
E2	6.00	6.20	6.40
H	20.8	21.0	21.2
H1	19.5	20.0	20.5
H2	3.70	4.00	4.30
G	5.70	5.90	6.10
ΦP	3.30	3.50	3.70
ΦQ	2.30	2.50	2.70

Notice

Thunder Microelectronics Incorporated Limited reserves the right to make changes without further notice to any products or specifications herein. When use the product, be sure to obtain the latest specification.

Thunder Microelectronics Incorporated Limited does not assume any liability arising out of the application or any product described herein. When using Thunder Microelectronics Incorporated Limited products in your equipment, you are requested to take adequate safety measures to prevent the equipment from causing a physical injury ,fire or other problem if any of the products become faulty.

-Headquarters

WuXi Thunder Microelectronics Incorporated Limited

Building E1-9, No.200 LingHu Road, XinWu district,WuXi,China 214135

Tel:+86-510-85160109

Fax:+86-510-85160109