

V_{RRM}	=	650	V
$I_F (AVG)$	=	30	A
Q_C	=	72	nC

Silicon Carbide Schottky Diode

Features

- Zero Reverse Recovery Current
- Zero Forward Recovery Voltage
- Positive Temperature Coefficient on V_F
- Temperature-independent Switching
- 175°C Operating Junction Temperature


Benefits

- Replace Bipolar with Unipolar Device
- Reduction of Heat Sink Size
- Parallel Devices Without Thermal Runaway
- Essentially No Switching Losses

Applications

- Switch Mode Power Supplies
- Power Factor Correction
- Motor drive, PV Inverter, Wind Power Station

Package

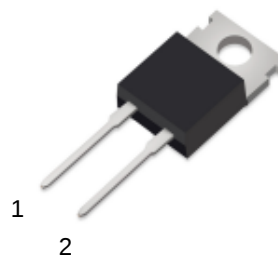

TO-220C-2L



Part Number	Package	Marking
THS30C65SC2	TO-220C-2L	THS30C65SC2

Maximum Ratings

Symbol	Parameter	Value	Unit	Conditions	Note
V_{RRM}	Repetitive Peak Reverse Voltage	650	V		
V_{DC}	DC Blocking Voltage	650	V	$I_R=1mA, T_J = 25^\circ C$	
I_F	Continuous Forward Current	50 30 29	A	$T_J = 25^\circ C$ $T_J = 120^\circ C$ $T_J = 125^\circ C$	
I_{FSM}	Non-repetitive Peak Forward Current	147	A	$T_J=25^\circ C, t_p=10ms$, Half Sine Wave (After test : $V_F \geq 0.5V @ I_F=1mA$; $V_R \geq 500V @ I_R=1mA$; $I_R \leq 5mA @ V_R=650V$)	
		138	A	$T_J=125^\circ C, t_p=10ms$, Half Sine Wave (After test : $V_F \geq 0.5V @ I_F=1mA$; $V_R \geq 500V @ I_R=1mA$; $I_R \leq 5mA @ V_R=650V$)	
P_{tot}	Power Dissipation	230	W	$T_J = 25^\circ C$	
T_J, T_{STG}	Operating Junction and Storage Temperature	-55 to 175	$^\circ C$		

Electrical Characteristics

Symbol	Parameter	Typ.	Max.	Unit	Test Conditions	Note
V_F	Forward Voltage	1.42 2.03	1.8 -	V	$I_F = 30A, T_J = 25^{\circ}C$ $I_F = 30A, T_J = 175^{\circ}C$	Fig.1
I_R	Reverse Current	0.01 2.16	10 -	μA	$V_R = 650V, T_J = 25^{\circ}C$ $V_R = 650V, T_J = 175^{\circ}C$	Fig.2
C	Total Capacitance	72 1364 129	/	pF	$V_R = 0V, T_J = 25^{\circ}C, f = 1MHz$ $V_R = 200V, T_J = 25^{\circ}C, f = 1MHz$ $V_R = 400V, T_J = 25^{\circ}C, f = 1MHz$	Fig.3
Q_C	Total Capacitive Charge	72	/	nC	$V_R = 400V, I_F = 30A$ $di/dt = 200A/\mu s, T_J = 25^{\circ}C$	Fig.4

Thermal Characteristics

Symbol	Parameter	Typ.	Unit	Note
$R_{\theta JC}$	Thermal Resistance from Junction to Case	0.61	$^{\circ}C/W$	

Electrical Characteristic Curves

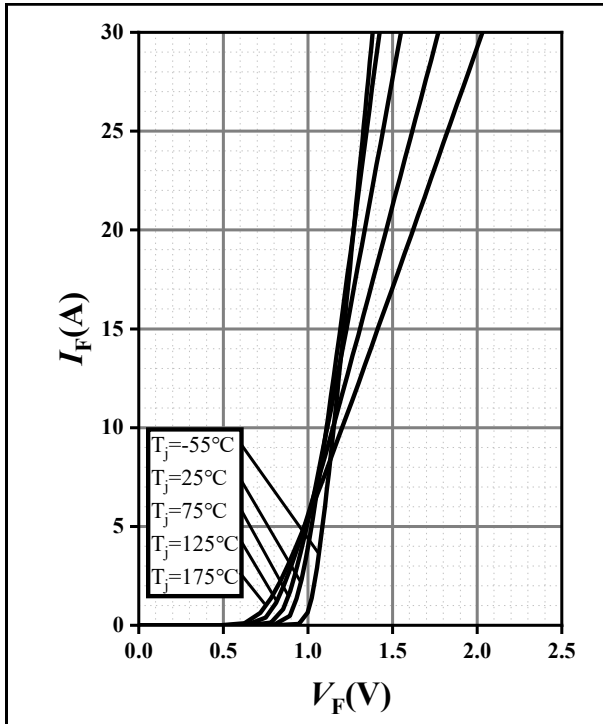


Fig.1 Forward Characteristics

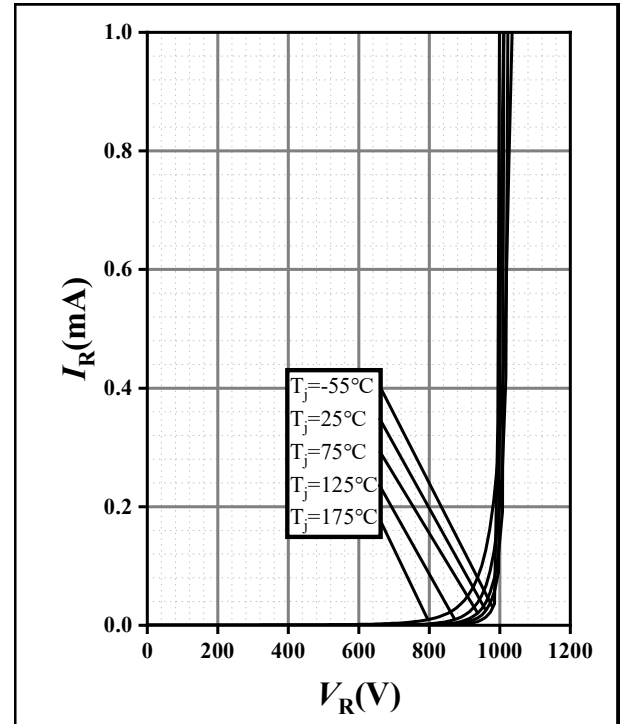


Fig.2 Reverse Characteristics

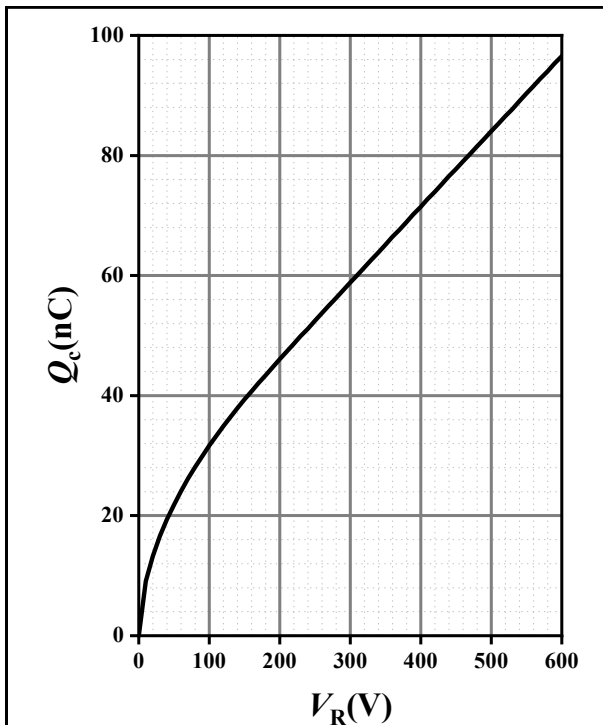


Fig.3 Capacitance Charge vs. Reverse Voltage


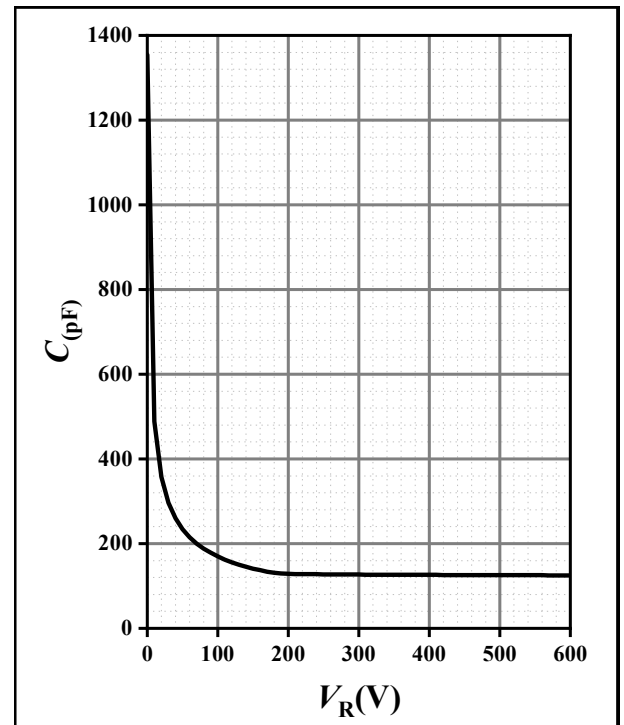


Fig.4 Capacitance vs. Reverse Voltage

Package Information

TO-220C-2L PACKAGE

基本尺寸

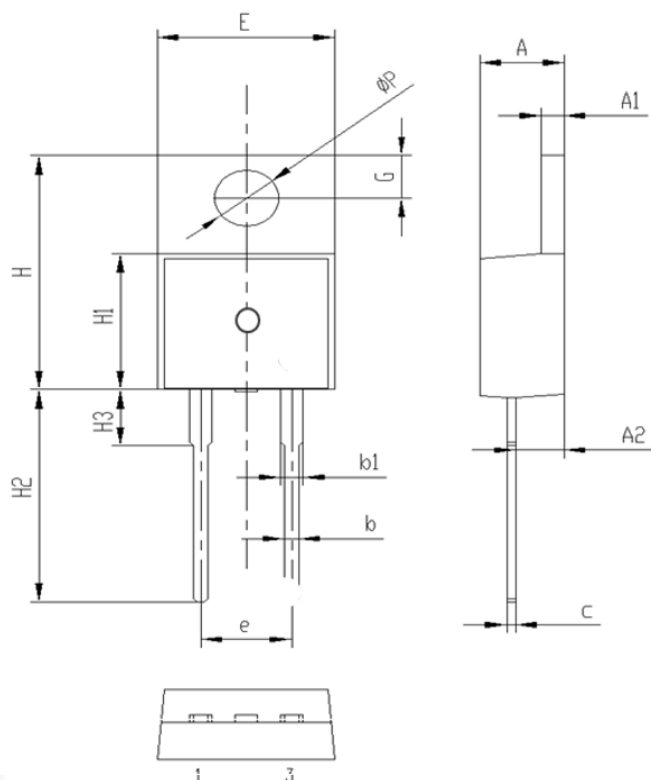

Symbol	单位 mm		
	Min	Nom	Max
A	4.30	4.50	4.70
A1	1.2	1.3	1.4
A2	2.30	2.40	2.50
b	0.60	0.8	1.00
b1	1.15	1.35	1.55
c	0.40	0.50	0.60
e	4.88	5.08	5.28
E	9.8	10.0	10.2
H	15.5	15.7	15.9
H1	9.00	9.20	9.40
H2	12.5	13.0	13.5
H3	2.80	3.0	3.20
G	2.60	2.8	3.00
ΦP	3.40	3.6	3.80

Notice

Thunder Microelectronics Incorporated Limited reserves the right to make changes without further notice to any products or specifications herein. When use the product, be sure to obtain the latest specification.

Thunder Microelectronics Incorporated Limited does not assume any liability arising out of the application or any product described herein. When using Thunder Microelectronics Incorporated Limited products in your equipment, you are requested to take adequate safety measures to prevent the equipment from causing a physical injury ,fire or other problem if any of the products become faulty.

-Headquarters

WuXi Thunder Microelectronics Incorporated Limited

Building E1-9F, No.200 LingHu Road, XinWu district,WuXi,China 214135

Tel:+86-510-85160109

Fax:+86-510-85160109